



AUGUSTA

luxury vinyl flooring

GOLDEN BELL

TEA OLIVE

AZALEA


MAGNOLIA



JUNIPER

FIRETHORN

COLOURS

- Lightweight, quick and easy to install
- Warm, quiet and soft under foot
- Natural looking grain and surface texture
- Easy to clean and maintain
- Highly resilient, no chipping or cracking
- Excellent UV stability
- Certified to –ASTM F1700 Standards
- 15 years residential warranty against wear

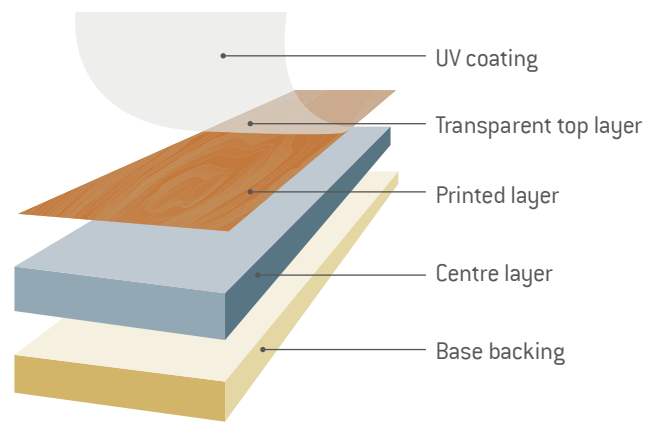

LUXURY VINYL TILE (LVT)	STICK	BEVELLED EDGE	TOP LAYER 0.3MM
Format	178mm{w} x 1219mm{l}		
Surface Finish	matt, embossed		
Bevelled Edge	yes		
Thickness	2mm		
Wear Layer	0,3mm		
Packaging	3,25m² per box 15 pieces per box		

TEST	TEST METHOD	LEGNO RESULTS
SOUND REDUCTION	EN ISO 717-2: 2013	7dB
ABRASION	EN 649: 2011	Group T
SLIP RESISTANCE	EN 13036 - 4: 2011	R10
DIMENSIONAL STABILITY	EN ISO 23999	≤ 0.25%
PEELING RESISTANCE	EN ISO 24345	≥ 50 N/50mm
CURL (6h - 80C)	EN ISO 23999	± 2.0mm (0.3)
SQUARENESS	EN ISO 24342	L: ≤ 0.35mm
		W: ≤ 0.25mm
CASTOR CHAIR RESISTANCE	ISO 4918	After 25000 Cycles - No Damage
COLOUR FASTNESS	EN ISO 105-B02 method 3	≥ 6
RESIDUAL INDENTATION	EN ISO 24343-1	≤ 0.10mm
GLOSS	Factory Method	6-10°
OPENING BETWEEN PLANKS	Factory Method	Average <0.15
LVT ADHESIVE PEELING RESISTANCE	EN ISO 24345	≥ 0.4 N/50mm

The vinyl flooring contains no harmful chemicals as far as could be established during testing.

Plasticisers found are iso or terephthalates which are not considered as a health risk.

For fitting instructions and further product information, please visit our website www.limegreenss.co.za



Light
Foot Traffic



Wet Areas



Indoor



Floor Tile



Limit direct
sunlight
(<27 Deg C)



Slip Resistance
R10



Shade Variation V2



Glue Down

